



Transformer


Input leads are 18 AWG. Output leads are 12 AWG. Lead insulation is 105 °C. The transformer uses a class B 130 °C insulation system.

Enclosure

Enclosure temperature will not exceed 70 °C @ 40 °C ambient. Wiring compartment has 2 knockouts sized for 3/4 inch screw cable connectors. The removable cover for the wiring compartment is secured in place by a screw. The enclosure is black powder coated.

General

- Manual reset thermal circuit breaker on the secondary side.
- Controlled with a low-voltage dimmer.
- ETL listed
- CSA listed
- UL standard 5085-1
- NEMA 3R enclosure

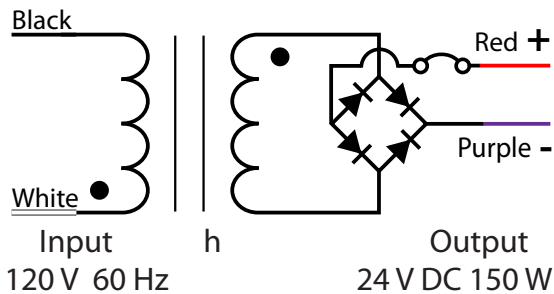

Max Load 150 W

Input Voltage 120 V 60 Hz

Output Voltage Full Load 23 VDC

Input Current Full Load 1.27 A

Open Circuit Volts 25 VDC

Output Current Full Load 6.25 A

Efficiency 87.50%

Coil Former Double Section Bobbin

Thermal Class B 130 °C

Leads Primary PVC 600 V #18

Leads Secondary PVC 300 V #12

Dimensions in inches:

Height 9.17"

Width 3.06"

Depth 2.94"

