

LED FLEX STRIP - Bright Plus

Model: FA60M28-10M-24V-X (X = COLOR W:Neutral White / WW:Warm White)



MODEL

FA60M28-10M-24V-X

- COLOR (W=Neutral White, WW=Warm White)
- VOLTAGE (24V)
- LENGTH (10 Meters/32.8 Foot)
- LED TYPE (2835 SMD)
- LED/METER (60LED/Meter)
- COVER TYPE (Type A, no coating)
- A=IP20 B=IP62 C=IP64
- FLEX STRIP

24V
DC Power

2.2
WATTS
FOOT

80
CRI

LISTED
use only with
Class 2 Type
power units

flexible

VIEW ANGLE
120°

40,000+
HOURS

DIMMABLE

TRIMMABLE

STATIC ELECTRICITY
CAN DAMAGE
PRODUCT

BENEFITS


- Dimmable Via optional dimming solutions
- View Angle 120°
- Double sided 3M Tape backing
- Ultra bright surface - mount LEDs
- Low power consumption and little heat
- No RF interference
- Long life of LEDs, new 2835 SMD LED
- Flexible LED strip lights
- Solid-state lighting
- Continuous length
- Can be cut to size at marked intervals (Qualified personnel)
- Available in Warm White and Neutral White

APPLICATIONS



- Store Fixture shelving
- Architectural accenting
- Backlighting of glass and acrylic
- Corporate showrooms and exhibition displays
- Optional aluminum mounting channel with clear and diffused lens

SPECIFICATIONS

Roll Size	10 Meters (32.8 Feet)
Max Voltage	24 VDC (regulated/Class 2)
Watt / Foot	2.2 (3 Amps/Roll)
Light Source	60 pcs/Meter (39.37") 2835 SMD LED
Dimensions	10000(L) x 10(W) x 1(H)mm (32.8' x 25/64" x 0.03")
Max Length	10 Meters (32.8 Feet)
View Angle	120°
Brightness	200~220 LM/ft (30.5cm)
Bend Radius	4 inches (100mm) Max, one flat plane
Lamp Life	>40,000 hours (average life)
IP Rating	IP20 Type A
Mount	Smooth Clean Surface/burrows free
Operating Temperature	-25°C ~ +40°C (-13°F ~ +104°F)



DIAGRAM

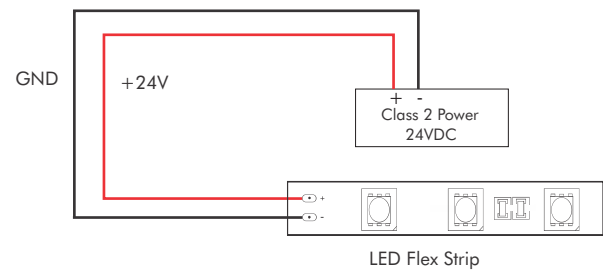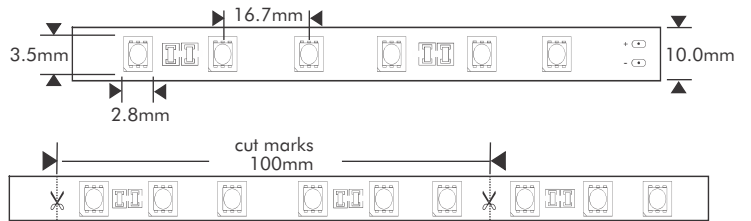

OPTIONAL CLASS 2 POWER SUPPLIES/ACCESSORIES

<p>XLD200B-224V-FC (24VDC) 2 Channel Output-Class 2</p>	<p>MD-024-192VTHJ (192W) Multi tab Dimmable Class 2 Driver</p>	<p>CVN96L24DC 96W Regulated Driver</p>	<p>MD-024-060VTH (60W) Dimmable Class 2</p>
---	--	--	---

