LED FLEX STRIP - EvenBrighter™

Model: FA630M21-XM-24V-COLOR (X = Length 2M / 4M, COLOR = WW:Warm White / NW:Neutral White)

LED WORLD Inc.
ledworldlighting.com | ledworld.ca
1-800-387-4081

MODEL

FA630M21-XM-24V-X

- **COLOR** (WW, NW)
- **VOLTAGE** (24V)
- **LENGTH** (2 Meters, 4 Meters)
- **LED TYPE** (2110 SMD)
- **LED/METER** (630LED/Meter)
- **COVER TYPE** (Type A, no coating) A=IP22 B=IP62 C=IP64
- **FLEX STRIP**

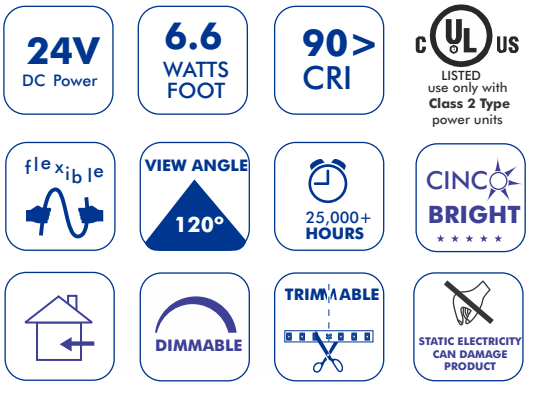

BENEFITS

- High density, No spotting even lighting
- Dimmable
- View Angle 120°
- Double sided 3M Tape backing
- Ultra bright surface - mount LEDs
- CRI 90 or better
- Super bright 2110 SMD LEDs
- Long life of LEDs, LM-80 tested LEDs
- Flexible LED strip lights
- Can be cut to size at marked intervals (about an inch)
- Available in Warm White (3000K) and Neutral White (4200K)

APPLICATIONS

- Store Fixture shelving
- Architectural accenting
- Backlighting of glass and acrylic
- Corporate showrooms, jewelry showrooms and exhibition displays
- Optional aluminum mounting channel with clear and diffused lens

DIAGRAM

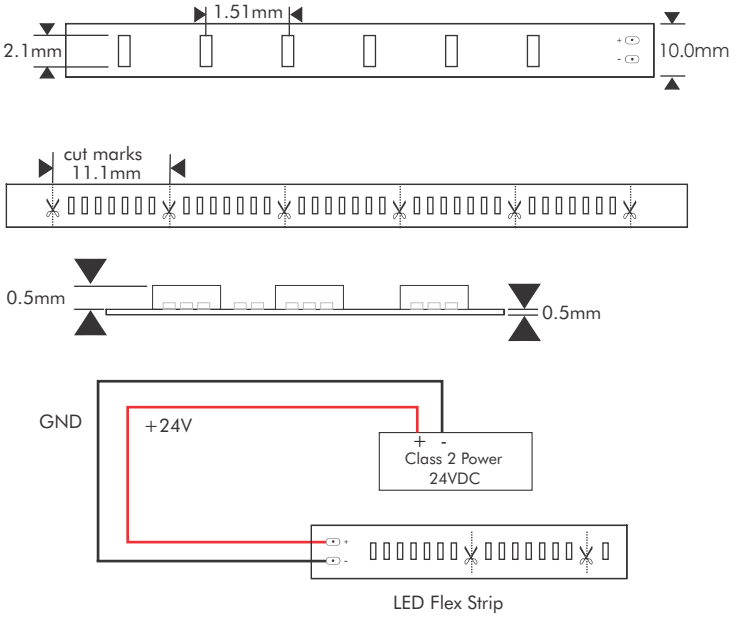

SPECIFICATIONS

Roll Size	2 Meters (6.5 Feet), 4 Meters (13.1 Feet)
Max Voltage	24 VDC (regulated/Class 2)
Watt Foot	6.6 (1.8 Amps/ 2m Roll, 3.6 Amps/ 4m Roll)
Light Source	630 pcs/Meter (39.37") 2110 SMD LED
Dimensions	10(W) x 1.0(H)mm (3/8" x 3/100")
Max Length	2 Meters (6.5 Feet), 4 Meters (13.1 Feet)
View Angle	120°
Brightness	590~620 LM/ft (30.5cm)
Bend Radius	4 inches (100mm) Max, one flat plane
Lamp Life	>25,000 hours (average life)
IP Rating	IP22 Type A
Mount	Smooth Surface/burrows free
Operating Temperature	-25°C ~ +40°C (-13°F ~ 104°F)

OPTIONAL ACCESSORIES

XLD200B-224V-FC (24VDC)	MD-024-192VTHJ	CVN96L24DC	MD-024-060VTH
2 Channel Output-Class 2	(192W) Multi tab Dimmable Class 2 Driver	96W Regulated Driver	(60W) Dimmable Class 2

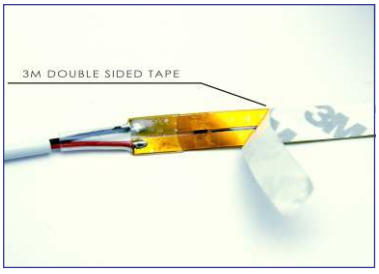

Copyright © 2020 LED WORLD INC™. All Rights Reserved. We are not responsible for errors or omissions. Product and specifications subject to change without notice. Registered trademarks are owned by their respective registers, or licensee(s).