
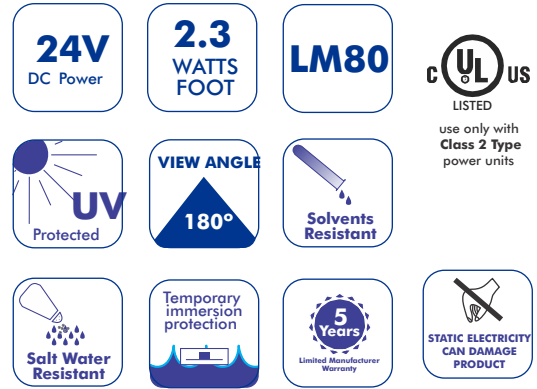


# NEO-FLEX LED STRIP LIGHT

Model: FC120M30-10M-24V-X [Color: White (3000k, 6500K), Yellow, Red, Green, Blue]

**LED WORLD**  
ledworldlighting.com | ledworld.ca  
1-800-387-4081

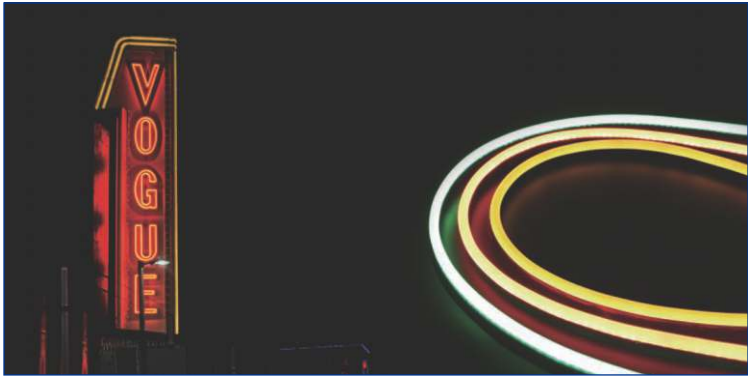

## FEATURES

- Even Neon lighting
- Fabricated with Eco-friendly, UV-resistant silicone material
- V-2 flame retardant
- Low voltage (24VDC) LED Neon
- Cut marks at each 1.97 inch
- Lateral bend flexible Neon LED light
- 50mm (1.97") max. bending
- Available in Warm White (3000K), Cool White (6500K), Yellow, Orange, Red, Green and Blue

## APPLICATIONS

- Sign lighting
- Corporate showrooms signs, exhibition sign displays
- Indoor/Outdoor decoration lighting


## SPECIFICATIONS

Roll Size	10 Meters (32.80 Feet)
Input Voltage	24 VDC (regulated/Class 2), (3.1 Amps/Roll)
Watt Foot	2.1W (White), 2.3W (Red, Orange, Yellow, Blue, Green)
LED Qty	120 pcs/Meter (39.37")
Dimensions	10,000(L) x 10(W) x 25(H)mm (32.8' x 0.39" x 0.98")
Max Length	10 Meters (32.80 Feet)
View Angle	180°
Cut Mark	50mm (1.97")
Bend Radius	1.97 inches (50mm) Max, one flat plane
IP Rating	IP68
Installation	Bracket, Aluminum Channel
Operating Temperature	-25°C ~ +45°C (-13°F ~ 113°F)

## AVAILABLE COLORS

	Warm White(3000K) - 180~220lm
	Neutral White (4100K) - 180~220lm
	Yellow - 135~148lux
	Red - 125~142lux
	Green - 90~115lux
	Blue - 40~50lux

## BEND RADIUS

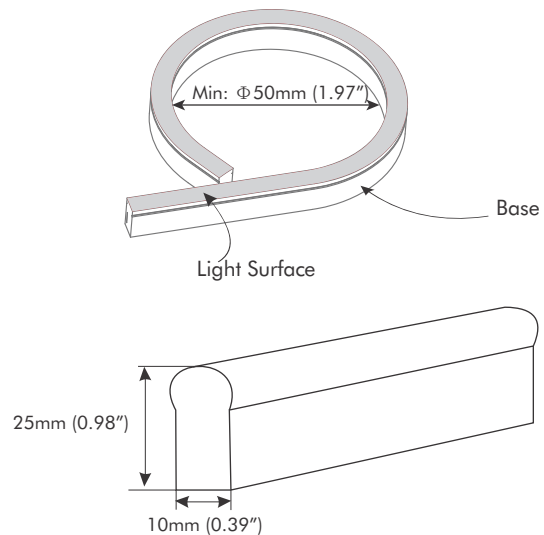

## ACCESSORIES

Aluminum channel (N24-ACL)	Power supply connector right end (N24-PCR)	Power supply connector (N24-PCI)	Interconnection connector (N24-ICSF)	Interconnection L connector (N24-LCS)	Mounting Clips (N24-ACS)	Silicone end cap (N24-ECS)

## POWER SUPPLIES

XLD200B-224V-FC 24VDC Class 2 Power Supply)	CVN96L24DC 24VDC Class 2 Power Supply)