

# LED PUCK LIGHT RECESSED/SURFACE MOUNT

Model: QS-107T-2.2W-12V-X



## No Light Spotting

**12V**  
DC Power

**2.2**  
WATTS

**80>**  
CRI

DIMMABLE



### FEATURES & BENEFITS

- Ultra thin Surface / Recessed Mount Puck light
- Changeable magnetic trim ring and surface mount ring
- Uniform luminance even lighting
- No glare
- Dimmable
- 110° beam angle
- CRI 80 or better
- 3 Year Limited Warranty
- 50,000+ hr lifetime



### APPLICATIONS

- Cabinet Lighting

### SPECIFICATIONS

Voltage	12 VDC
Watts	2.2 Watts
Lumens	80 Lumens/W
Color Temperature	2700K, 3000K, 4000K
Light Source	2.2W SMD LED
Size	Ø 75 x H 7 mm (2.95" x 0.27")
CRI	>80
Beam Angle	110°
Trim Color	White (Optional Chrome/Black/Satin Nickel)
IP Grade	IP44
Environment Temp	Max 45°C (113°F) Indoor Use
Lifespan	50,000 hrs
Certifications	ETL
Limited warranty	3 years


### DIAGRAM

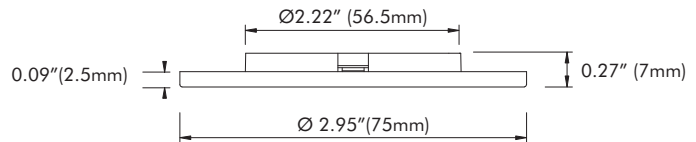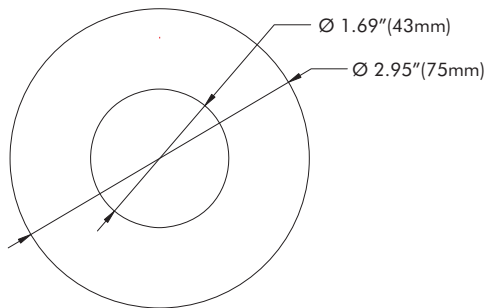

### CHANGEABLE TRIM & MOUNTING RING



Magnets to attract and hold the trim ring


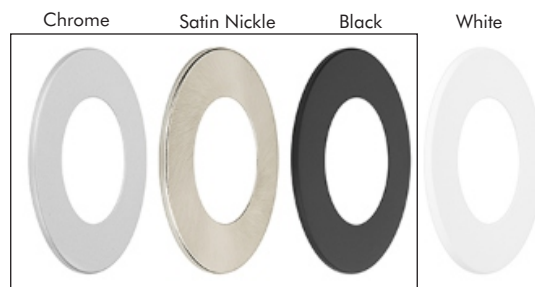


Optional Colors

# LED PUCK LIGHT RECESSED/SURFACE MOUNT

Model: QS-107T-2.2W-12V-X

## PHOTOMETRICS

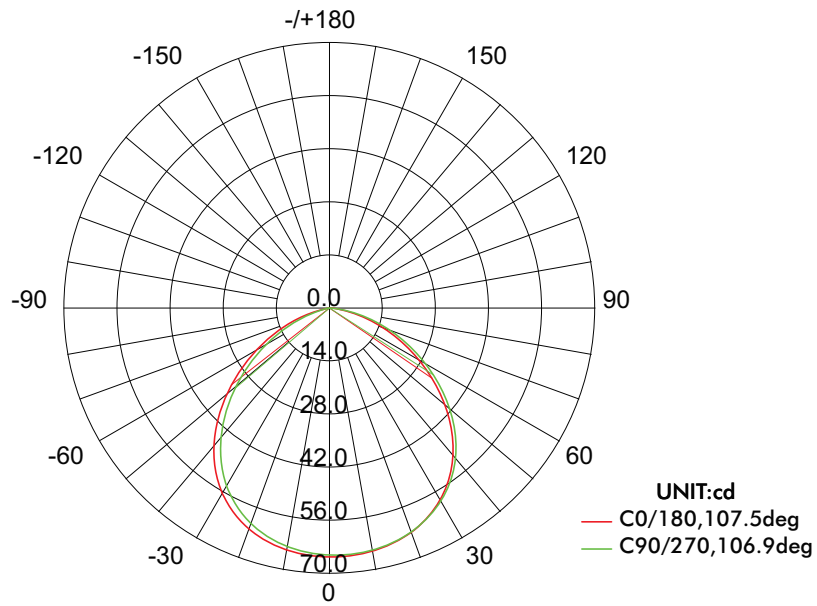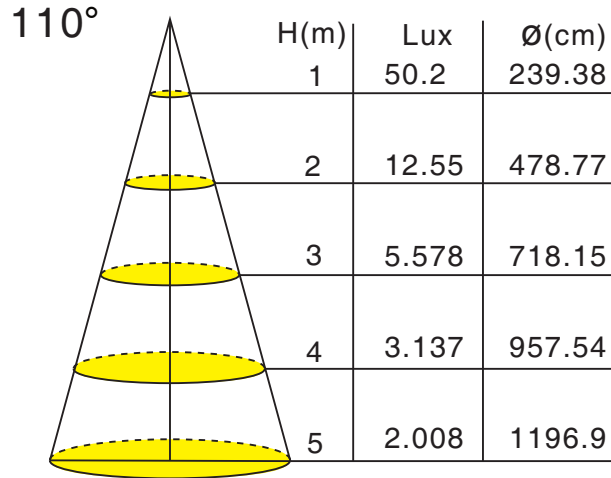

AVERAGE BEAM ANGLE(50%): 107.2 DEG

## OPTIONAL ACCESSORIES

MD-012-030VTDHV2 Regulated Dimmable Class 2	MD-012-060VTDHV2 Regulated Dimmable Class 2