HIGH DENSITY RGBW LED FLEX STRIP

Model: FA-4040-120-24-RGBW-5M

LED WORLD INC
ledworldlighting.com | ledworld.ca
1-800-387-4081

MODEL : FA-4040-120-24-RGBW-5M

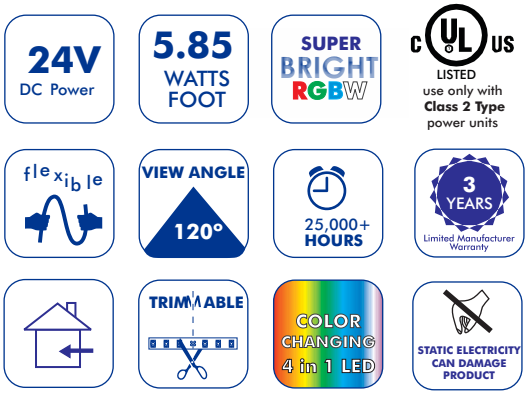

FEATURES

- FPC material, excellent flexibility
- Can be cut at marked intervals (Every 6 LEDs)
- 4 in 1 4040 SMD LEDs (Red, Green, Blue and White(3000K))

APPLICATIONS

- Store Fixture shelving
- Architectural accenting
- Backlighting of glass and acrylic
- Corporate showrooms and exhibition displays
- Optional aluminum mounting channel

SPECIFICATIONS

Roll Size	5 Meters (16.4 Feet)
Max Voltage	24 VDC (regulated/Class 2)
Watt Foot	5.85W (4 Amps/roll)
Light Source	120 pcs/Meter (39.37") 4040 SMD LED
Dimensions	10(W) x 2.1(H)mm (0.39" x 0.08")
Color Temperature	White (3000K±100K)
Max Length	5 Meters (16.4 Feet)
View Angle	120°
Max Current	250mA/foot
Bend Radius	4 inches (100mm) Max, one flat plane
Lamp Life	>25,000 hours (average life)
IP Rating	IP20 Type A
Mount	Surface: burrows free - metal surface/Aluminium Profiles
Operating Temperature	-25°C ~ +40°C (-13°F ~ 104°F)

DIAGRAM

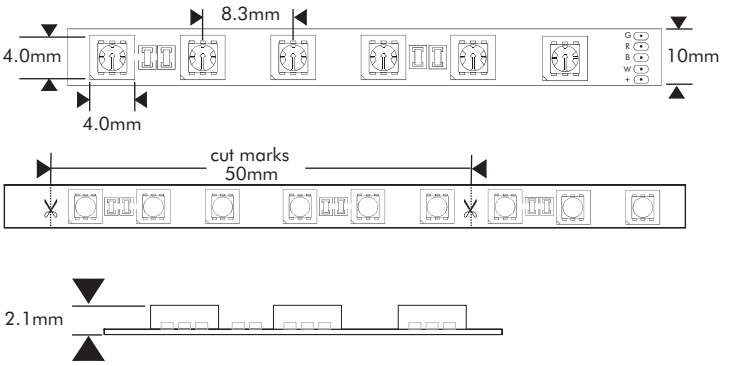

OPTIONAL CONTROLLERS

FUT089 RGBW Remote	HUEDA™	HUEDA™ HUB

OPTIONAL CLASS 2 POWER SUPPLIES

MD-024-060VTDHV2 60W Constant Voltage Driver	MD-024-096VTDHV2 96W Constant Voltage Driver



New RGBW - 4 Color Chips in 1 LED



Common RGBW used Now



Copyright © 2025 LED WORLD INC™. All Rights Reserved. We are not responsible for errors or omissions. Product and specifications subject to change without notice. Registered trademarks are owned by their respective registers, or licensee(s).